


2

1

Aztec Shear Banded Coupling 265-290mm

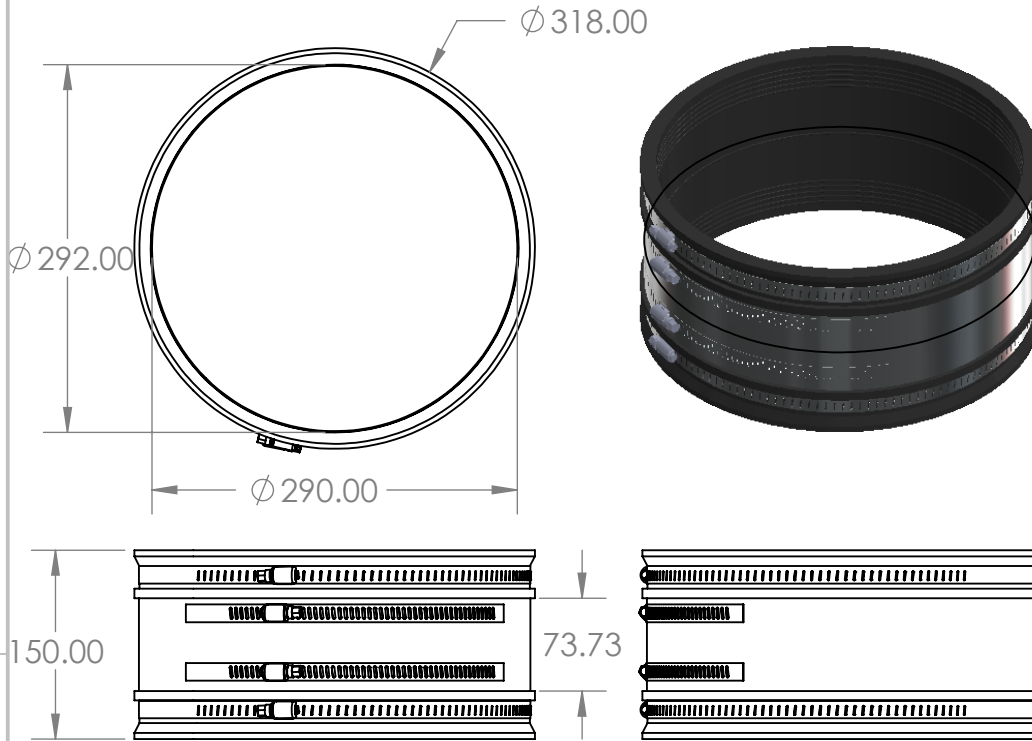

QnA

Q. What is the use of the flexible connector?

A. For the joining of applications of pipes below and above ground. Flexible connectors are suitable for low pressure drainage systems.

Q. What is Aztec's Aussie Connectors pipe range?

A. 32mm – 300mm

Q. Are these suitable for potable water?

A. Testing is not a requirement under the current watermark certificate. Aussie Connectors are not advised to be used on potable waterlines.

Q. What is the pipe suitability?

A. PVC, Copper, Galvanised Steel, Cast Iron.

Description

Aztec now has a range of Shielded Couplings designed for robust Aussie conditions. Specifically designed for the connection or the repair of pipes on sewer and drainage lines.

The additional stainless-steel wrap around coupling supports the middle section, allowing the pipes to stay aligned and ensure minimal pipe displacement in robust conditions.

-Additional wrap around stainless steel coupling to withstand robust conditions

-Withstands an internal pressure of up to 1 bar

-Stainless steel shielded band prevents pipe displacement

-Complies with AS/NZS 4327-1995

-WaterMark® approved

-Wasa Approved



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE:					
		DIMENSIONS ARE IN INCHES		DRAWN							
		TOLERANCES:		CHECKED							
		FRACTIONAL ±		ENG APPR.							
		ANGULAR: MACH ± BEND ±		MFG APPR.							
		TWO PLACE DECIMAL ±		Q.A.		Assembly ASC265-290					
		THREE PLACE DECIMAL ±		COMMENTS:							
		INTERPRET GEOMETRIC TOLERANCING PER:									
		MATERIAL									
		FINISH									
NEXT ASSY	USED ON			SCALE: 1:10 WEIGHT:					SHEET 1 OF 1		
APPLICATION		DO NOT SCALE DRAWING									

2

1