



2


1

Aztec ProFlash Roll 280mm x 5mt Blk



B

B

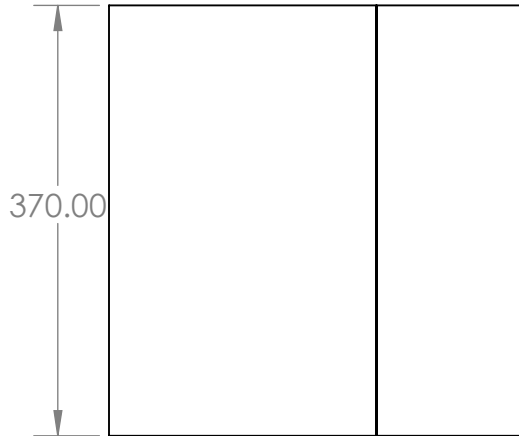

Description

Aztec ProFlash® Flexi Roll has been developed as an alternative to the use of lead material on Roofs. The ProFlash® Flexi Roll membrane material contains an innovative polymer made of advanced isobutylene EPDM embedded with aluminum mesh. While ProFlash® Flexi Roll has the same malleability as lead, it offers many more benefits than lead base flashing:

- Lead free flashing – No more heavy lifting!
- Suitable for drinking water application. Complies with AS/NZS 4020
- Safer and Toxic Free
- UV Rated / Tested
- Complies with the AS/NZS 2904: 1995 Damp Proof Courses and Flashings
- Environmentally friendly – Nontoxic – Lead Free
- Fully adhesive backing
- Easy and quick to install
- Suitable for almost any roof materials and profiles

A

A



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AZTEC AUSTRALASIA. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AZTEC AUSTRALASIA IS PROHIBITED.

| | | | | | | | | |
|--|-------------|--------------------------------------|----------------------|------|------|------------|------------------|--------------|
| | | UNLESS OTHERWISE SPECIFIED: | | NAME | DATE | | | |
| | | DIMENSIONS ARE IN INCHES | DRAWN | | | TITLE: | | |
| | | TOLERANCES: | CHECKED | | | | | |
| | | FRACTIONAL ± | ENG APPR. | | | | | |
| | | ANGULAR: MACH ± BEND ± | MFG APPR. | | | | | |
| | | TWO PLACE DECIMAL ± | Q.A. | | | SIZE | DWG. NO. | REV |
| | | THREE PLACE DECIMAL ± | COMMENTS: | | | A | AZTPR370B | |
| | | INTERPRET GEOMETRIC TOLERANCING PER: | | | | SCALE: 1:5 | WEIGHT: | SHEET 1 OF 1 |
| | | MATERIAL | | | | | | |
| | | FINISH | | | | | | |
| | NEXT ASSY | USED ON | | | | | | |
| | APPLICATION | | DO NOT SCALE DRAWING | | | | | |

2

1