
# MasterFlash No1 Square Base 6 – 70mm Black

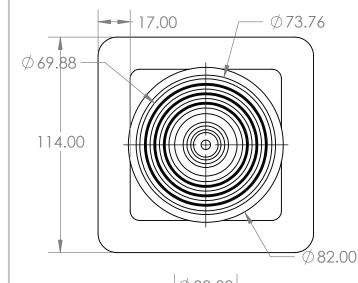


Ø 43.00

 $\emptyset$  63.00

1.00

В

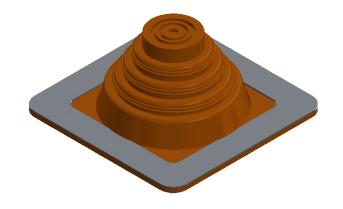

# **Description**

- EPDM rubber.
- Available in Black, Grey and silicone red
- Also available in BHP roofing colours on request.
- Size range: 0mm to 1m available.
- All EPDM Master Flash pipe flashings have a high temperature resistance of 135°C intermittently. A red silicone compound is also available, and this product has a high resistance of 260°C intermittently.
- Complies with BAL rating requirements.

#### **FAQs**

 $\emptyset$  53.00

3.00

#### Q. What is the highest temperature a Master Flash® pipe flashing will handle?

- All EPDM MasterFlash flashings 135°C intermittently.
- A silicone red flashing has a high resistance of 260°C intermittently.

### Q. What type of sealant should be used on the Master Flash® flashingb

- A good quality roof & gutter silicone sealant should always be used when installing a Master Flash pipe flashing for metal roofs.

## Q. What type of screws should be used to fasten the flashings?

- The use of a self-drilling screw or pop rivet (sealed) is always recommended.

What is the life expectancy of the Master Flash® flashings?


– All Master Flash products carry a 25-year warranty.

#### Q. What is the maximum roof pitch that the flashings can be used for?

– Most of our products are designed to cater to a roof pitch of 45°. If more is required, then our Master Flash Extreme Angle range is designed with a built in 40° pitch and therefore can handle a roof pitch from 35° – 65°.

#### Q. Is there a product that can flash a Square Pipe?

– Yes, our Master Flash Square Vent Range is available and will suit penetrations from 20mm – 125mm. Now also available in a lead base option.

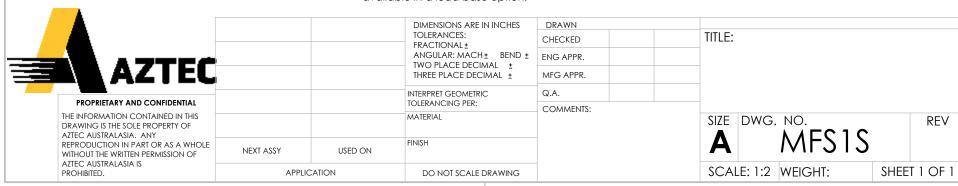

1

B

Α