
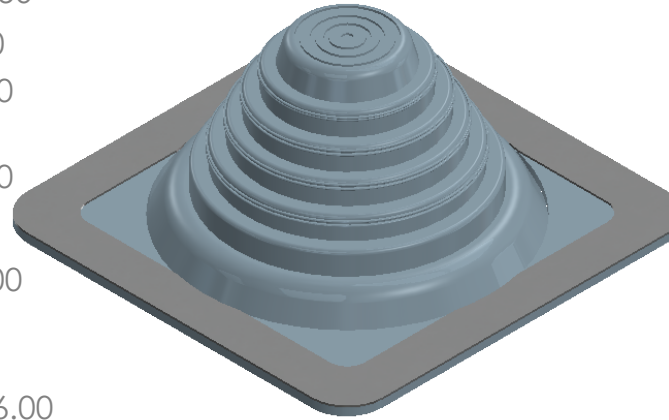


# MasterFlash No3 Square Base 6 – 146mm Grey

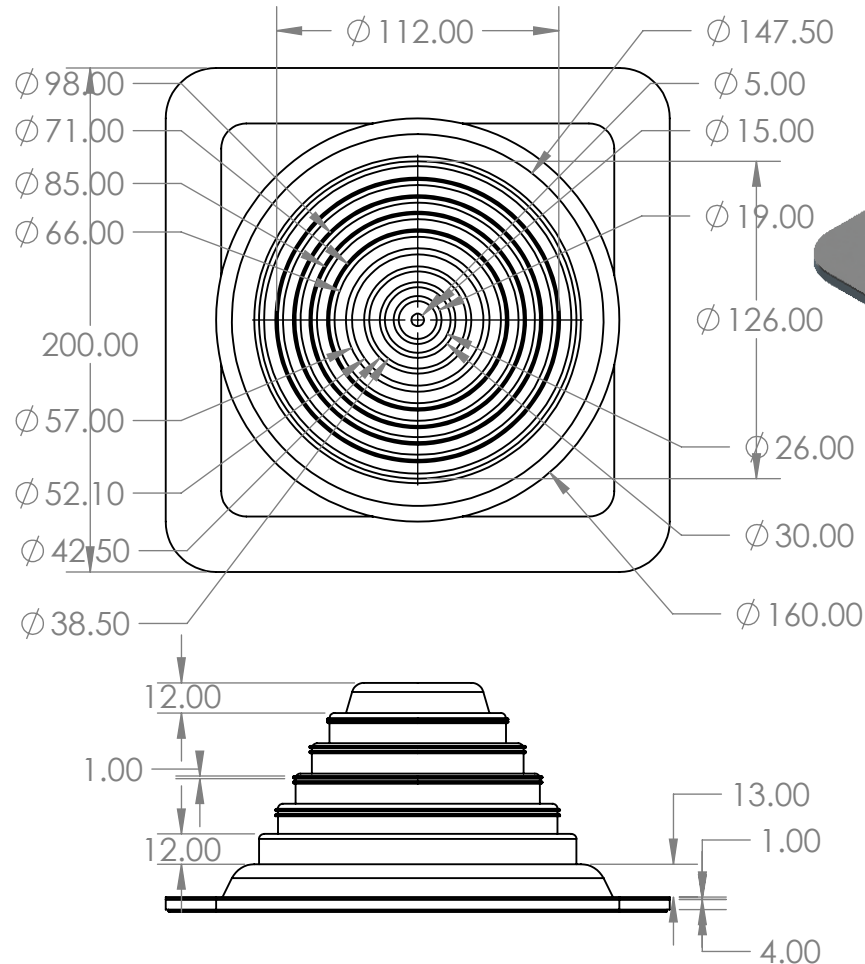

## Description

- EPDM rubber.
- Available in Black, Grey and silicone red.
- Also available in BHP roofing colours on request.
- Size range: 0mm to 1m available.
- All EPDM Master Flash pipe flashings have a high temperature resistance of 135°C intermittently. A red silicone compound is also available, and this product has a high resistance of 260°C intermittently.
- Complies with BAL rating requirements.

## FAQs

### Q. What is the highest temperature a Master Flash® pipe flashing will handle?

- All EPDM MasterFlash flashings 135°C intermittently.
- A silicone red flashing has a high resistance of 260°C intermittently.

### Q. What type of sealant should be used on the Master Flash® flashings?

- A good quality roof & gutter silicone sealant should always be used when installing a Master Flash pipe flashing for metal roofs.

### Q. What type of screws should be used to fasten the flashings?

- The use of a self-drilling screw or pop rivet (sealed) is always recommended.

### What is the life expectancy of the Master Flash® flashings?

- All Master Flash products carry a 25-year warranty.

### Q. What is the maximum roof pitch that the flashings can be used for?

- Most of our products are designed to cater to a roof pitch of 45°. If more is required, then our Master Flash Extreme Angle range is designed with a built in 40° pitch and therefore can handle a roof pitch from 35° – 65°.

### Q. Is there a product that can flash a Square Pipe?

- Yes, our Master Flash Square Vent Range is available and will suit penetrations from 20mm – 125mm. Now also available in a lead base option.



## PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AZTEC AUSTRALASIA. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AZTEC AUSTRALASIA IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:			NAME		DATE		TITLE:	
		DIMENSIONS ARE IN INCHES			DRAWN					
		TOLERANCES:			CHECKED					
		FRACTIONAL ±			ENG APPR.					
		ANGULAR: MACH ±    BEND ±			MFG APPR.					
		TWO PLACE DECIMAL    ±			Q.A.				SIZE    DWG. NO.    REV <div>A    MFS3G</div>	
		THREE PLACE DECIMAL    ±			COMMENTS:					
		INTERPRET GEOMETRIC TOLERANCING PER:								
		MATERIAL								
		FINISH								
NEXT ASSY		USED ON								
APPLICATION			DO NOT SCALE DRAWING				SCALE: 1:5		WEIGHT:	
									SHEET 1 OF 1	