


MasterFlash No0 Square Base 0 – 20mm Grey

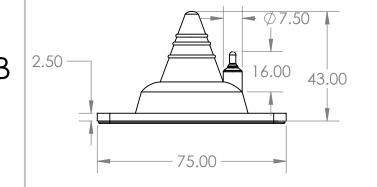

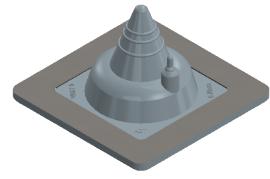

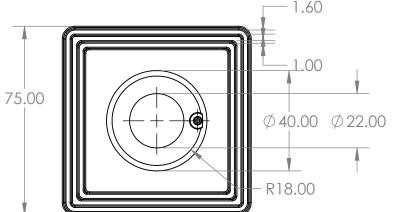

Description

- EPDM rubber.
- Available in Black, Grey and silicone red.
- Also available in BHP roofing colours on request.
- Size range: 0mm to 1m available.
- All EPDM Master Flash pipe flashings have a high temperature resistance of 135°C intermittently. A red silicone compound is also available, and this product has a high resistance of 260°C intermittently.
- Complies with BAL rating requirements.

FAQs

What is the highest temperature a Master Flash® pipe flashing will handle?

- All EPDM MasterFlash flashings 135°C intermittently.
- A silicone red flashing has a high resistance of 260°C intermittently.

What type of sealant should be used on the Master Flash® flashings?

 A good quality roof & gutter silicone sealant should always be used when installing a Master Flash pipe flashing for metal roofs. В

What type of screws should be used to fasten the flashings?

- The use of a self-drilling screw or pop rivet (sealed) is always recommended.

What is the life expectancy of the Master Flash® flashings?

– All Master Flash products carry a 25-year warranty.

What is the maximum roof pitch that the flashings can be used for?

– Most of our products are designed to cater to a roof pitch of 45°. If more is required, then our Master Flash Extreme Angle range is designed with a built in 40° pitch and therefore can handle a roof pitch from 35° – 65°.

Is there a product that can flash a Square Pipe?

Yes, our Master Flash Square Vent Range is available and will suit penetrations from 20mm – 125mm. Now also available in a lead base option.

| | | | | UNLESS OTHERWISE SPECIFIED: | | NAME | DATE | | |
|----------|---|-------------|---------|---|-----------|------|------|------------------------------|------|
| \ | | | | DIMENSIONS ARE IN INCHES | DRAWN | | | | |
| | | | | TOLERANCES: FRACTIONAL ± | CHECKED | | | TITLE: | |
| | AZTEC | • | | ANGULAR: MACH± BEND ± TWO PLACE DECIMAL ± | ENG APPR. | | | | |
| | | 1 | | THREE PLACE DECIMAL ± | MFG APPR. | | | | |
| | | | | INTERPRET GEOMETRIC TOLERANCING PER: | Q.A. | | | | |
| | PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <insert any<="" company="" here».="" name="" td=""><td></td><td></td><td colspan="2">COMMENTS:</td><td></td><td></td><td></td></insert> | | | | COMMENTS: | | | | |
| | | | | MATERIAL | | | | 1 - 1 - 1 - 1 | EV |
| | REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF | NEXT ASSY | USED ON | FINISH | _ | | | A MFSOG | |
| | <insert company="" here="" name=""> IS PROHIBITED.</insert> | APPLICATION | | DO NOT SCALE DRAWING | | | | SCALE: 1:2 WEIGHT: SHEET 1 C | OF 1 |

2

1