

AZTEC

PRO FLASH FLEXI ROLLS

AVAILABLE IN
BLACK, GREY &
TERRACOTTA



INTRODUCING PRO FLASH

The latest innovative
and high quality
plumbing product
from Aztec

BaL²⁹

- ✓ No more heavy lifting - a great alternative to lead based products
- ✓ Tested for use with potable water (AS/NZS 4020)
- ✓ Far easier and quicker to install than traditional lead rolls and sheets
- ✓ Suitable for most roofing profiles and roofing materials
- ✓ Clean and green - Non-toxic

SEE OVER FOR SPECIFICATIONS

CALL FOR ALL PRODUCT RANGES & SIZES

P: (03) 9768 2394

Email: orders@aztecau.com.au - www.aztecau.com.au

70 Logis Boulevard, Dandenong South VIC AUSTRALIA 3175

 AZTEC

Aussie Tough. Aztec Smart.



FLEXI ROLL

Aztec Pro Flash® Flexi Roll is developed as an alternative for lead tile flashings, but it has become a more versatile roof solution than the traditional lead flashings. Unlike the lead flashings which are normally used on tile roof, it suits almost any roof materials or profiles including metal, tile, fibreglass, polycarbonate etc.


Pro Flash® Flexi Roll membrane material contains an innovative polymer made of advanced isobutylene EPDM embedded with aluminium mesh.

The **Pro Flash® Flexi Roll** base material has the desired malleability same as the lead. However, it offers many more benefits than the lead base flashing does.



KEY FEATURES LEAD FREE FLASHING:

- ✓ Lead free flashing - No More Heavy Lifting
- ✓ Suitable for drinking water application, Tested to the AS/NZS 4020 Testing Standard
- ✓ UV Rated / Tested (ASTM G154 and ASTM D7238)
- ✓ Complies with the AS/NZS 2904: 1995 Damp Proof Courses and Flashings
- ✓ Environment friendly - Non-toxic - Lead Free
- ✓ Full adhesive backing made with Butyl
- ✓ Easy and quick to install
- ✓ Suitable for almost any roof materials and profiles

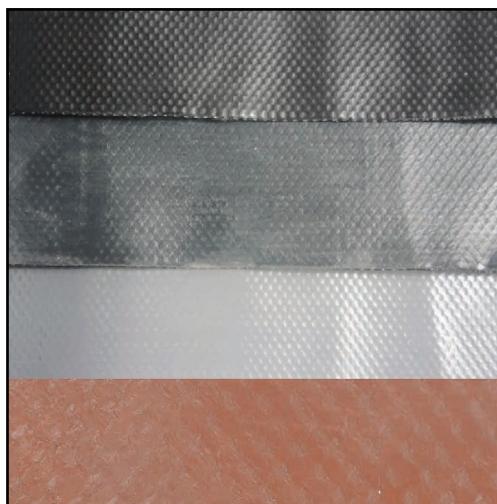

The base material of **Pro Flash® Flexi Roll** complies with AS/NZS 2904: 1995 Damp-Proof Courses and Flashings. The **Pro Flash® Flexi Roll** exhibits great weathering and UV resistance thus guarantees the long-term performance for outdoor applications.

When **Pro Flash® Flexi Roll** is installed by a qualified tradesperson, it will form a water-tight seal on your roof that will be long lasting and complete the required seal from any water leakage.

Base Material Properties

Thickness, mm	1.9mm ~ 2.1mm
Density	1.4 ~ 1.7 g/cm ³
Tensile strength	≥ 2 MPa
Stretch ability	
Longitudinal	Up to 50%
Transverse	Up to 15%
Service Temperature	-40 °C to +100 °C

INSTALLATION BENEFITS:

- ✓ Quick installation
- ✓ Easy to dress into shape by hand or soft hammer tool
- ✓ Easy to cut with scissors or knife if required
- ✓ No health risks such as lead poisoning associated with lifting heavy materials

Product Range

Product Code	Description	Colour
AZTPM140	140mm width x 0.50mm	Available in Black & Lead Grey
AZTPR280	280mm width x 5m	
AZTPR370	370mm width x 5m	Available in Black, Dark Grey, Lead Grey & Terracotta
AZTPR560	560mm width x 5m	

NOTES:

- ✓ Avoid pressure load by sharp objects (eg. tile notches)
- ✓ Maximum working length without joints = full length roll of 5m
- ✓ Can be joined by overlapping length by a minimum of 50mm

